



Set ID 工具設定說明

1. 開啟 SetID 工具程式(本程式不需要安裝過程，直接在電腦上點擊執行即可)。

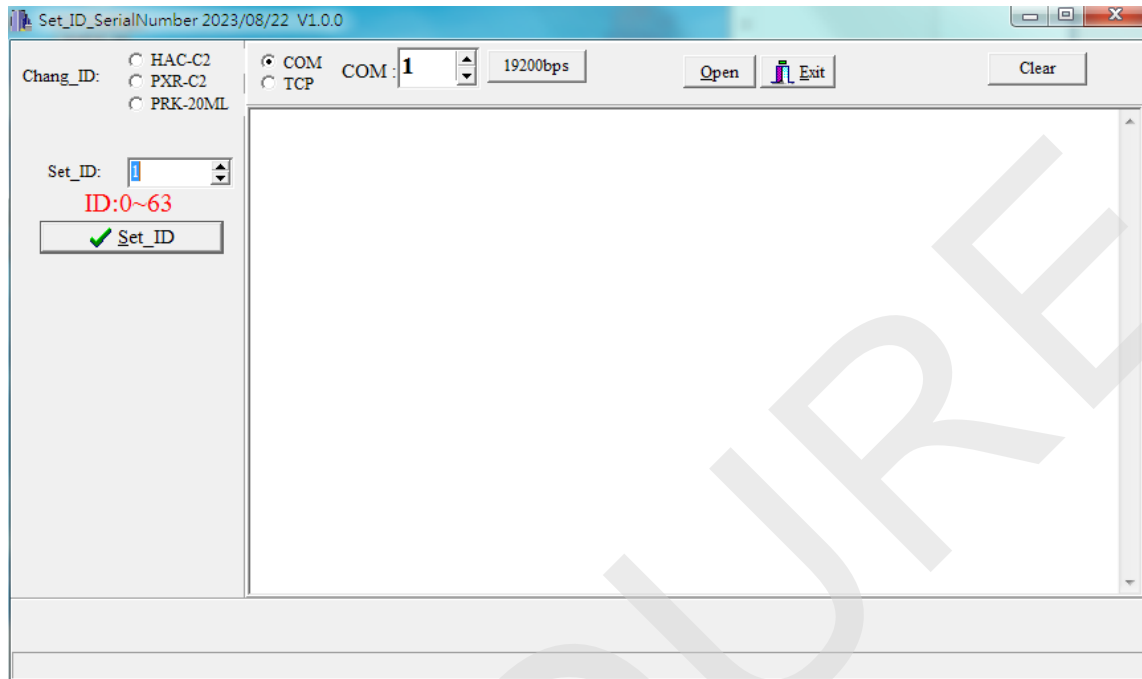

2. 通訊方式可選擇 COM PORT 或 TCP。
 - 選擇 COM Port，其傳輸速度固定 19200bps。
 - 選擇 TCP，則輸入 IP 及 PORT。
3. 選擇 TCP 做示範，選擇要變更的機種型號(HAC-C2/PXR-C2 或 PRK-20ML)輸入 IP 及 PORT，點擊 **Open**。

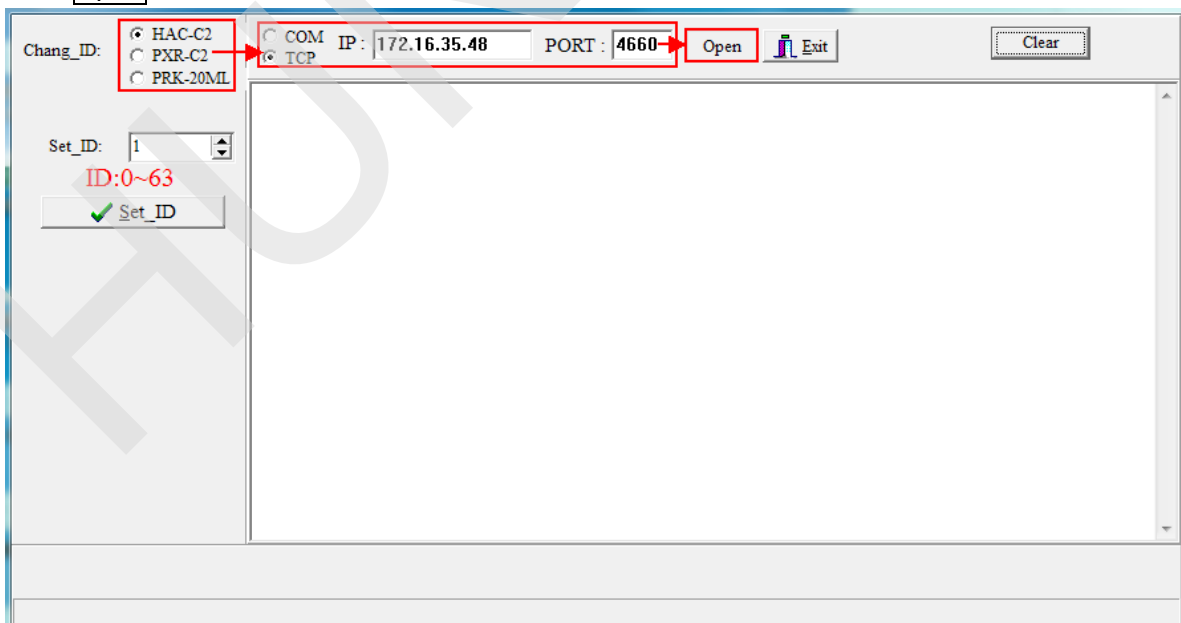

4. 顯示 TCP/IP Connecting...連結中，TCP/IP Connected! 連結完成。

The screenshot shows a software window with a left sidebar and a main content area. In the sidebar, under 'Chang_ID', 'HAC-C2' is selected. Below it, 'Set_ID' is set to 1, with a red label 'ID:0~63' and a 'Set_ID' button. The main content area has a status bar at the top showing 'COM TCP', 'IP: 172.16.35.48', and 'PORT: 4660'. Below this, a text box displays the connection sequence: 'TCP/IP Lookup !!', 'TCP/IP Connecting...', and 'TCP/IP Connected !'. The 'TCP/IP Connected !' line is highlighted with a red box. At the top right of the window are 'Close', 'Exit', and 'Clear' buttons.

5. Set_ID 欄位選擇通訊 ID，再點擊 **Set_ID**。

This screenshot is similar to the previous one, but the 'Set_ID' in the sidebar is now set to 2. A red box highlights the 'Set_ID' dropdown and the 'Set_ID' button, with a red arrow pointing from the dropdown to the button. The status bar and main content area remain the same as in the previous screenshot.

6. ID 完成設定，會顯示 SetID_OK 的訊息。(裝置 HAC-C2 修改成功，ID 變更為 2)

The screenshot shows the 'Set_ID' still set to 2. In the main content area, the text box now displays 'SetID_OK' in red, which is highlighted with a red box. The status bar and other interface elements are consistent with the previous steps.

7. 若選擇變更 PRK-20ML 的 ID，則 ELN:輸入該電子鎖序號(出廠序號為 ELN*****)，Set_ID 欄位選擇通訊 ID，再點擊 **Set_ID**。

This screenshot shows the 'Chang_ID' changed to 'PRK-20ML'. In the sidebar, an 'ELN:' field contains the value '23A1705'. Below it, 'Set_ID' is set to 3, with a red label 'ID:0~63' and a 'Set_ID' button. A red box highlights the 'Set_ID' dropdown and the 'Set_ID' button, with a red arrow pointing from the dropdown to the button. The main content area shows the connection sequence, with 'SetID_OK' highlighted in red. The status bar shows 'COM TCP', 'IP: 172.16.35.48', and 'PORT: 4660'.

8. 點擊 **Exit**，則離開程式。