


# PXR-10 EM Reader

## Features

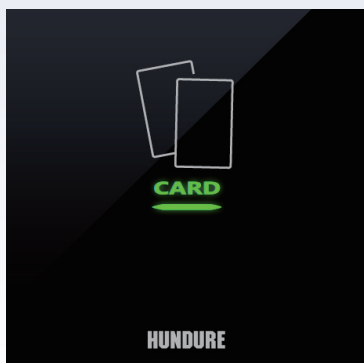

- Flush mount design, stylish and slim appearance design with tempered glass material, combines high-tech, security and aesthetic appearance. Looks great to match with modern interior decoration.
- Supports EM card (125 KHz)
- Read range is around 4 cm.
- Provides different communication interfaces for choice to work with controllers.
- Provides RS-485 communication interface to suit for long distance installation(PXR-10 ES).
- Wide operation temperature range; It can be installed in extreme cold or hot regions.
- Case sensor detection function.
- Watchdog function secures system free from halting.


## Ordering Information

### Package Content:

- PXR-10 x 1
- Quick Start Guide x 1
- Accessory Pack x 1

### Model No. Identification

#### P X R - 1 0 E W

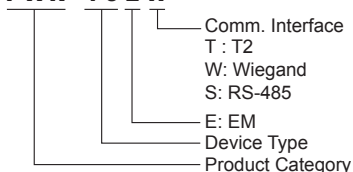

### Color

●  
Black  
(BL)

## Specification

Model No.	PXR-10ET	PXR-10EW	PXR-10ES
Read Format	EM ( 125 KHz )		
Read Range	5 cm		
Comm. Interface	T2	Wiegand	RS-485
Input Port	Case Sensor x 1		
ID Setting	None		DIP switch
Comm. Baudrate	N/A		19,200 bps-N-8-1
LED Indicator	Green / Red Bi-color LED x 1 (Status / Power)		
Beep Tone	Buzzer		
Power Input	DC 12V / 1A		
Current Consumption	300mA (max)		
Operating Temp.	-40°C~ 70°C / -40°F~ 158°F		
Relative Humidity	20% ~ 80%(Non-condensing)		
Dimensions (LxWxH)(mm)	Faceplate : 86(L) x 86(W) x 13(H)(mm) Backside box : 65(L) x 58(W) x 24(H)(mm)		