


PXR-10 Mifare Reader

Features

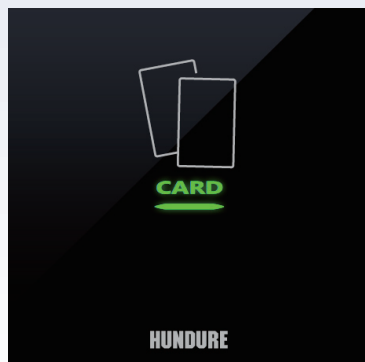

- Flush mount design, stylish and slim appearance design with tempered glass material, combines high-tech, security and aesthetic appearance. Looks great to match with modern interior decoration.
- Conforms to ISO 14443A, supporting Mifare card.
- Unique ID or Block read format supported and programmable key value.
- Provides different communication interfaces for choice to work with controllers.
- Provides RS-485 communication interface to suit for long distance installation(PXR-10 MS).
- Wide operation temperature range; It can be installed in extreme cold or hot regions.
- Case sensor detection function.
- Watchdog function secures system free from halting.


Ordering Information

Package Content:

- PXR-10 x 1
- Quick Start Guide x 1
- Accessory Pack x 1

Model No. Identification

P X R - 1 0 M W

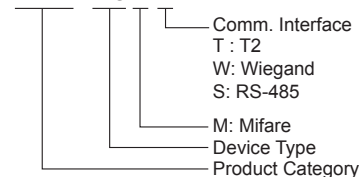

Color

●
Black
(BL)

Specification

| Model No. | PXR-10MT | PXR-10MW | PXR-10MS |
|------------------------|---|----------|------------------|
| Read Format | Mifare (13.56 MHz) | | |
| Read Range | 5 cm | | |
| Comm. Interface | T2 | Wiegand | RS-485 |
| Input Port | Case Sensor x 1 | | |
| ID Setting | None | | DIP switch |
| Comm. Baudrate | N/A | | 19,200 bps-N-8-1 |
| LED Indicator | Green / Red Bi-color LED x 1 (Status / Power) | | |
| Beep Tone | Buzzer | | |
| Power Input | DC 12V / 1A | | |
| Current Consumption | 300mA (max) | | |
| Operating Temp. | -20°C~ 70°C / -4°F~ 158°F | | |
| Relative Humidity | 20% ~ 80%(Non-condensing) | | |
| Dimensions (LxWxH)(mm) | Faceplate : 86(L) x 86(W) x 13(H)(mm) Backside box : 65(L) x 58(W) x 24(H)(mm) | | |