



PXR-14 Mifare (Keypad) Reader

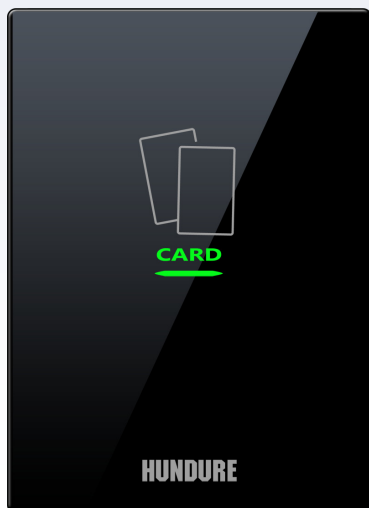

PXR-14MS

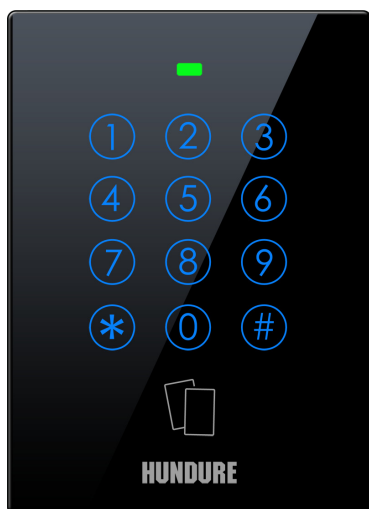

PXR-14MWSK

Features

- Conforms to ISO 14443A, supporting MIFARE card.
- Unique ID or Block read format supported and programmable key value.
- Slim, stylish design, capacitive touch keypad with blue backlight. (PXR-14MWSK)
- Keypad function. When working with controller, it provides unlock modes including card-swiping, pressing keypad or card-swiping with password to unlock. (PXR-14MWSK)
- Flush mount design; Looks great to match with modern interior decoration.
- Provides dual interface (Wiegand and RS-485) model to meet different project requirements and reduce inventory costs. (PXR-14MWSK)
- Provides RS-485 communication interface for long distance installation
- Wide range of operating temperature to meet the requirements of tropical or frigid zone climate environment.
- Case sensor detection function to enhance the system security.
- Watchdog function secures system free from halting.

Ordering Information

Package Content:

- PXR-14 x 1
- Quick Start Guide x 1
- Accessory Pack x 1

Model No. Identification

P X R - 1 4 M W S K

- Keypad
- Comm. Interface
- W: Wiegand
- S: RS-485
- WS: Wiegand & RS-485
- M: Mifare
- Device Type
- Product Category

Color

●
Black
(BL)

Specification

Model No.	PXR-14MW	PXR-14MS	PXR-14MWSK
Read Format	Mifare (13.56 MHz)		
Read Range	3 cm		
Comm. Interface	Wiegand	RS-485	Wiegand & RS-485
Keypad	None		12 Keys (0-9, *, #)
Input Port	Case Sensor x 1		
ID Setting	None	DIP switch	DIP switch
Comm. Baudrate	None	19,200 bps-N-8-1	19,200 bps-N-8-1
LED Indicator	Green / Red Bi-color LED x 1 (Status / Power)		
Beep Tone	Buzzer		
Power Input	DC 12V / 1A		
Current Consumption	300mA (max)		
Operating Temp.	-20°C ~ 70°C / -4°F ~ 158°F		
Relative Humidity	20% ~ 80% (Non-condensing)		
Dimensions (LxWxH)(mm)	Faceplate : 122(L) x 88(W) x 13(H)(mm) Backside box : 65(L) x 58(W) x 24(H)(mm)		