

PXR-71 Mifare Reader



Features

- Narrow mullion design is pretty suitable for installing on door frame or in tight space.
- Supports Mifare (13.56MHz) card.
- Provided a case sensor switch, it can be connected to the controller and operated by the controller.
- Reader's LED & Buzzer controls can be set by upstream control panel.
- Wide range of operating temperature to meet the requirements of tropical or frigid zone climate environment.
- Watchdog function secures system free from halting.
- Unique ID or Block read format supported and programmable key value.
- Conforms to ISO 14443A; supporting MIFARE card.


Ordering Information

Package Content:

- Reader x 1
- Accessory Pack x 1
- Quick Start Guide x 1

Model No. Identification

P X R - 7 1 M W

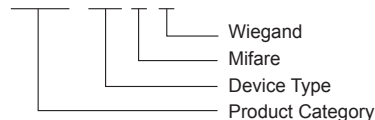

Color

●
Light Gray
(LG)

Specifications

Model No.	PXR-71MW
Read Format	Mifare (13.56 MHz)
Read Range	2 cm
Comm. Interface	Wiegand
Input Ports	LED Control× 1, Buzzer Control× 1
Output Port	Case Sensor x 1, Wiegand x 1
LED Indicator	Read / Green Bi-color LED x 1 (Status / Power)
Real Time Clock	Yes
Beep Tone	Buzzer
Power Input	DC 12V
Current Consumption	300mA (max.)
Operating Temp.	-20°C ~ 70°C / -4°F ~ 158°F
Relative Humidity	20% ~ 80% (Non-condensing)
Dimension (mm)	130 (L) x 45 (W) x 25 (H)