
PXR-Q2MS QR Code Reader



Features

- Conforms to ISO 14443A, supporting MIFARE card.
- Unique ID or Block read format supported and programmable key value.
- Support scanning static QR code (smart phone or paper printing) and dynamic QR code (with APP).
- Supports to scan a QR Code from your smart phone or paper
- Support QR Code scanning function to replace RFID cards sensing
- Case sensor detection function to enhance the system security.
- Wide range of operating temperature to meet the requirements of tropical or frigid zone climate environment.
- Watchdog function secures system free from halting.
- Supports to read 7 byte serial number while reading Mifare card






For Android For iOS

Please scan QR Code to download mCard App

Ordering Information

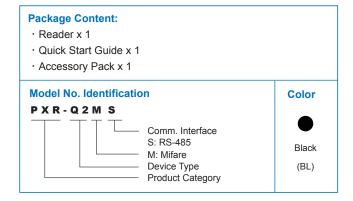

Specifications

Model No.	PXR-Q2MS
Read Format	Mifare (13.56 MHz)
Read Range	3 cm above
QR Code Scan	Auto scan : Get close to scan automatically
	Supports to scan a QR Code from your smart phone or paper
	Scan Distance : 5 CM above
Comm. Interface	RS-485 X 1
ID Setting	6 DIP Switch
Input Port	Case Sensor x 1
LED Indicator	Green / Red Bi-color LED x 1 (Status / Power)
Beep Tone	Buzzer
Power Input	DC 12V
Current Consumption	300mA (max)
Operating Temp.	-20°C~ 70°C / -4°F~ 158°F
Relative Humidity	20% ~ 80%(Non-condensing)
Dimensions (mm)	Faceplate: 120(L) x 75(W) x 14(H) Backside box: 70(L) x 42(W) x 24(H)