Reader


PXR-10 MWSK Mifare Keypad Reader

ŀ	IUNDUR	E	
	5	Э	
4	5	6	
7	8	9	$\begin{bmatrix} & & \\ & & \\ & & \end{bmatrix}$
*		#	

Features

- Conforms to ISO 14443A, supporting MIFARE card.
- Unique ID or Block read format supported and programmable key value.
- Slim, stylish design, capacitive touch keypad with blue backlight. (PXR-10MWSK)
- Keypad function. When working with controller, it provides unlock modes including card-swiping, pressing keypad or card-swiping with password to unlock. (PXR-10MWSK)
- Flush mount design; Looks great to match with modern interior decoration.
- Provides dual interface (Wiegand and RS-485) model to meet different project requirements and reduce inventory costs.
- Wide range of operating temperature to meet the requirements of tropical or frigid zone climate environment.
- Case sensor detection function to enhance the system security.
- Watchdog function secures system free from halting.

Ordering Information

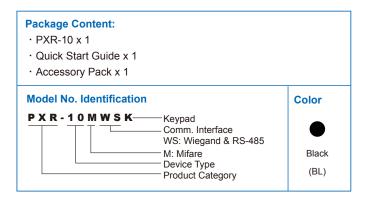

Specification

Model No.	PXR-10MWSK
Read Format	Mifare (13.56 MHz)
Read Range	3 cm
Comm. Interface	Wiegand & RS-485
Keypad	12 Keys (0-9,*,#)
Input Port	Case Sensor x 1
ID Setting	DIP switch
Comm. Baudrate	19,200 bps-N-8-1
LED Indicator	Green / Red Bi-color LED x 1 (Status / Power)
Beep Tone	Buzzer
Power Input	DC 12V / 1A
Current Consumption	300mA (max)
Operating Temp.	-20°C~ 70°C / -4°F~ 158°F
Relative Humidity	20% ~ 80%(Non-condensing)
Dimensions (LxWxH)(mm)	Faceplate:86(L) x 86(W) x 13(H)(mm) Backside box:65(L) x 58(W) x 24(H)(mm)